

PROJECT NAME ITEM # FIXTURE SCHEDULE NOTES

STLED G3 Series

This strip light series is a great solution for commercial, industrial, retail, and residential applications. The sleek and slim design make these LED strip lights ideal for size-restricted locations and lower ceiling heights. Fixture can be used in storage/utility areas, display cases, shops, tasks, and general area lighting.

Specifications – STLED4-C30WT

CRI	80+	Ratings and Certifications	cULus, Damp Locations
Light Source	LED	Voltage	120-277V
Dimmable	0-10V dimming type is continuous to 10%	Surge	2kV
CCT	3500К / 4000К / 5000К	Mounting Options	Surface mount or suspended (v-hook)
Wattage	18W / 25W / 30W	Operating Temperature	-20° C to 50° C (-4° F to 122° F)
LPW	130	Lens	РММА
Lumens**	2500 / 3380 / 3900	Warranty	5 Years
Lifespan	> 100,000 hours to L70 @ 21° (70° F)		

Data is considered to be representative of the series. Actual production may vary between up to ±10% of initial delivered lumens. ** Lumen values based on 5000K.





PROJECT NAME ITEM # FIXTURE SCHEDULE NOTES

Order Information

Blade G3 Series				Example: STLED8-C90WT-DMV-G3
Series	Length	CCT/Wattage	Dimming	Generation
STLED	4 4 Foot	C30WT Selectable CCT - 35K / 40K / 50K Watt - 18w / 25w / 30w C35WT Selectable CCT - 35K / 40K / 50K Watt - 25w / 30w / 35w	DMV 0-10v Dimming Continuous to 10%	G3
	8 8 Foot	C90WT Selectable CCT - 35K / 40K / 50K Watt - 65w / 70w / 90w		

Mount Options

Surface Mount



Suspended (v-hook)



DLC Information

Item	DLC Version	DLC ID	Wattage	Lumens
STLED4-C35WT-DMV-G3	5.1 Standard	S-CM96ZN	35W	4620
STLED8-C90WT-DMV-G3	5.1 Standard	S-C6Y9B8	90W	12150




PROJECT NAME ITEM # FIXTURE SCHEDULE NOTES


Dimensions

ltem	Length	Width	Height	Weight
STLED4-C30WT-DMV-G3	47.3"	3.4"	3.6"	4.51 lbs.
STLED4-C35WT-DMV-G3	47.3"	3.4"	3.6"	4.51 lbs.
STLED8-C90WT-DMV-G3	94.2"	3.4"	3.6"	9.02 lbs.

STLED4

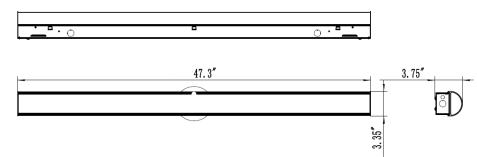

STLED8

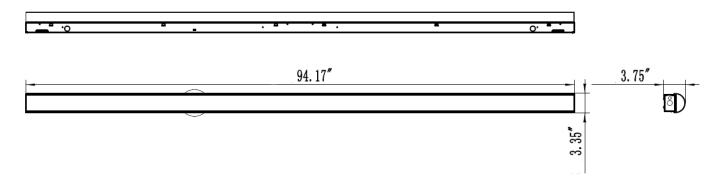



A simple and cost effective localized networked lighting control system using bluetooth mesh.

WareSense Blue delivers a comprehensive, gateway-free wireless solution for managing lighting across diverse settings. This innovative system features wireless controllers for fixtures, switches, and sensors for occupancy and daylight harvesting, all leveraging Bluetooth® technology. Additionally, the system includes a fixture-mounted controller and sensor that combine wireless communication and occupancy/daylight harvesting control into a single unit. Each component is uniquely addressed to send, receive, and share control commands wirelessly. Scalability is straightforward, as each device relays information to the next, extending the network's range and control capabilities.

App Download

